


REGAL[®]

HIGH FREQUENCY SATELLITE ACCESSORIES



APPLICATION

In addition to high frequency and diode protected splitters, this Regal line of DBS accessories includes an in-line amplifier, dual power inserter, and diplexer. Manufactured with traditional Regal quality. Chromate treated zinc alloy housing, tongue-and-groove housing, and exceptional EMI shielding will ensure consistent, superior performance for any DBS installation.

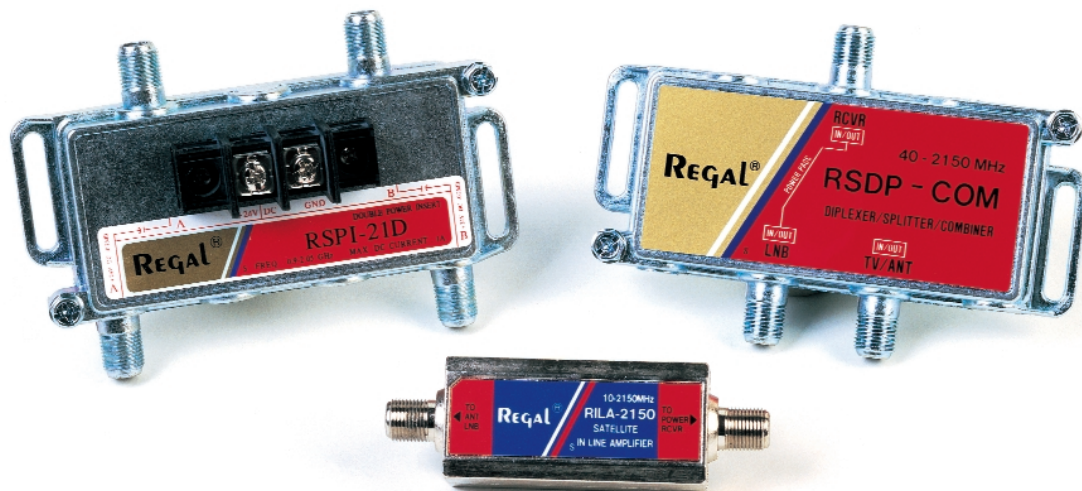

SPECIFICATIONS

RSDP-COM Diplexer

Frequency (MHz)	40	860	950	2150
Insertion Loss (dB Max.)	0.3	3.5	3	1.5
D/C Pass (LNB) (mA) (Max.)	500			
VHF/UHF	None			

RSDPI-21D Power Inserter

Frequency (MHz)	900-2050
Insertion Loss (dB Max.)	0.5
Isolation (dB Max.)	32
Return Loss	12
Max Current (amp)	1
Max Voltage (V dc)	24

RILA-2150 In-Line Amplifier

Frequency (MHz)	10-2150
Gain (dB)	15
Noise (dB)	7

ORDERING INFORMATION

High Frequency Accessories

Description	Model #	Part #
Diplexer	RSDP-COM	208083
In-Line Amplifier	RILA-2150	208082
Dual Power Inserter	RSDPI-21D	208084
Power Supply for Power Inserter	PS-SAT2	208857

Specifications are subject to change without notice.